

#### General Product Information:

ROXUL<sup>®</sup> products are mineral wool fibre insulations made from basalt rock and slag. This combination results in a non-combustible product with a melting point of approximately 2150°F (1177°C), which gives it excellent fire resistance properties. ROXUL mineral wool is a water repellent yet vapour permeable material.

#### Description & Common Applications:

The RHT 60<sup>™</sup> product is a non-combustible, semi-rigid mineral wool insulation board that is lightweight and water repellent. RHT 60 is excellent for specifications requiring high temperature (1200°F) insulation accompanied with a need for durability and some flexibility. Common applications include: general commercial construction, storage tank insulation, drying and oven equipment, petro-chemical and power generating equipment protection.

This product can be faced with reinforced foil, ASJ and glass mat facings. Please note that the facings will influence the product's service temperature range.

#### Compliance and Performance

ASTM C 612	Mineral Fiber Block and Board Thermal Insulation	Type IVB, Complies
CAN/CGSB 51.10-92	Mineral Fibre Board Thermal Insulation	Type 2, Class 4
MEA Approval	New York City Approval	331-97-M
City Of Los Angeles Approval		R 25444

#### Fire Performance

ASTM E 136	Behaviour of Materials at 750°C (1382°F)	Non-Combustible
CAN4 S114	Test for Non-Combustibility	Non-Combustible
ASTM E 84(UL 723)	Surface Burning Characteristics	Flame Spread = 0
		Smoke Developed = 0
CAN/ULC S102	Surface Burning Characteristics	Flame Spread = 0
		Smoke Developed = 0

FMVSS 302	Motor Vehicle Safety Test Method	Passed
-----------	----------------------------------	--------

#### Maximum Service Temperature

ASTM C 411	Hot Surface Performance	In Compliance with ASTM C612 @ 1200°F (650°C)
------------	-------------------------	---

#### Dimensional Stability

ASTM C 356	Linear Shrinkage	<1% @ 1200°F (650°C)
------------	------------------	----------------------

#### Moisture Resistance



ASTM C 1104	Moisture Sorption	0.01%
-------------	-------------------	-------

#### Corrosion Resistance

ASTM C 665	Corrosiveness to Steel	Passed
ASTM C 795 *	Stainless Steel Stress Corrosion Specification as per Test Methods C871 and C692: U.S. Nuclear Regulatory Commission, Reg. Guide #1.36: U.S. Military Specifications MIL-I-24244 (all versions including B and C)	Conforms

# RHT™60 INDUSTRIAL

## Thermal Conductivity (k):

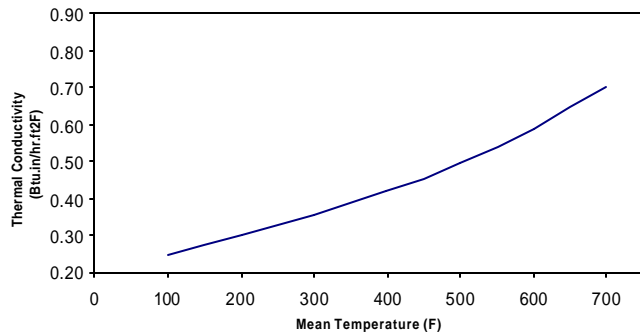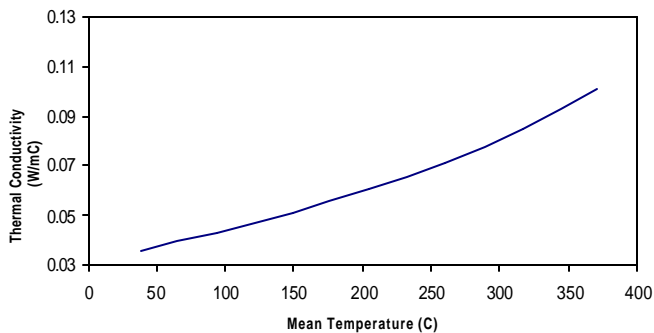

## Densities Available:

ASTM C 612-93 - Nominal	- 6.0 lbs/ft <sup>3</sup>	96 kg/m <sup>3</sup>
ASTM C 612-00 - Actual		
1" thickness	7.4 lbs/ft <sup>3</sup>	118 kg/m <sup>3</sup>
1.5" thickness	4.9 lbs/ft <sup>3</sup>	79 kg/m <sup>3</sup>
≥ 2" thickness	4.4 lbs/ft <sup>3</sup>	70 kg/m <sup>3</sup>

## Maximum Service Temperature:

1200°F (650°C) ASTM C 411

## Compressive Strength:

ASTM C 165

at 10%: 104 psf (5 kPa)

at 25%: 230 psf (11 kPa)

## Dimensions:

24" (width) x 48" (length)

1" through 4" in 1/2" increments (thickness)

For additional sizes, please contact our customer service representatives.

## Facings:

This product can be faced with reinforced foil, ASJ and glass mat facings. **Please note that the facings will influence the product's service temperature range.**

## Key Application Qualifiers:

- Easy to install
- Service temperature 1200°F (650°C)
- Non-combustible
- Lightweight
- Can be fabricated/laminated
- Excellent thermal resistance
- Low moisture sorption
- Good compressive resistance
- Non-corrosive
- Chemically inert
- CFC and HCFC free product and process
- Made from natural & recycled materials

## Other ROXUL Products:

Please consult ROXUL for all your insulation needs. We have an extensive range of products for all applications from pipe insulation to commercial products to residential batts. ROXUL invites all inquiries and will act promptly to service all of your requirements.



\* "Provisions for lot testing may be required, consult manufacturer."

Note:  
As ROXUL Inc. has no control over installation design and workmanship, accessory materials or application conditions, ROXUL Inc. does not warranty the performance or results of any installation containing ROXUL Inc's. products. ROXUL Inc's. overall liability and the remedies available are limited by the general terms and conditions of sale. This warranty is in lieu of all other warranties and conditions expressed or implied, including the warranties of merchantability and fitness for a particular purpose.

ROXUL INC. 551 Harrop Drive, Milton, Ontario L9T 3H3 Tel: 905 878-8474 Fax: 905 878-8077  
www.roxul.com Sales Office - Tel: 1-800-265-6878, Fax: 1-800-991-0110

Revised: June 1, 2002  
Supersedes: February 28, 2001